

User's Guide


EXTECH[®]

INSTRUMENTS

A FLIR COMPANY

Wireless AC Circuit Identifier

Models RT30 and RT30-E

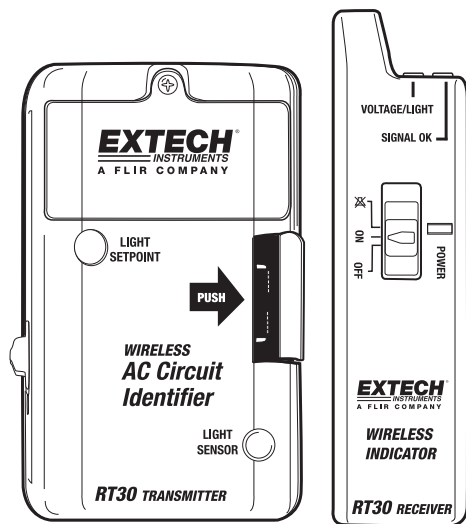

**Test Equipment
Depot**



1-800-517-8431

99 Washington Street
Melrose, MA 02176
Phone 781-665-1400
Toll Free 1-800-517-8431



Visit us at www.TestEquipmentDepot.com



Back to the Extech RT30 Product Info Page


Introduction

Congratulations on your purchase of Extech's Model RT30 Wireless AC Circuit Identifier. The detector can identify live circuits and detect changes in light level with the wireless receiver. With careful use, this detector will provide years of reliable service.

Meter Description


TRANSMITTER DESCRIPTION

1. Wire clamp slot
2. Wire Clamp release latch
3. Light sensor
4. Voltage/Light detect LED
5. Battery compartment
6. Power LED
7. Light setpoint button
8. Power/Mode select switch
9. External Probe Connector

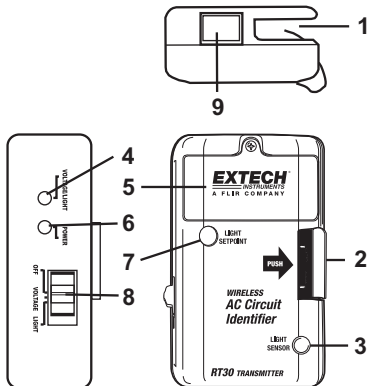

RECEIVER DESCRIPTION


1. Detect LED (Amber)
2. Communication LED (Yellow)
3. Power/Mode
4. Power LED (Green)
5. Battery compartment
6. Pocket clip
7. Audio Buzzer





Operation

Detecting Live Circuits (VOLTAGE method)

The RT30 can be directly clamped on installed building wiring and will detect the voltage applied to the wiring.

1. Slide the transmitter power switch to the VOLTAGE position. The POWER LED will switch on.
2. Slide the Receiver power switch to the ON position. The POWER LED and the SIGNAL OK LED will switch ON.
3. Place the Romex™/nm cable (AC wire) directly into the wire clamp slot or, alternatively, connect the external voltage detector probe into the external probe socket and then clamp the probe to any cable, extension cord or appliance cord.
4. If the cable is “live” (voltage present), the VOLTAGE/LIGHT amber LED on the transmitter will switch on and the DETECT LED on the receiver will switch on.
5. If desired, switch the receiver power switch to the audio OFF position  to disable the audible tone.
6. When the voltage is removed (by opening the splice or the circuit breaker, for example), the Detect LEDs will switch OFF and the detect beeper will switch OFF.




Note: Use of the External Probe overrides the setting of the Power/Mode Switch. The Lighting method cannot be used while the External Probe is attached.

Detecting Live Circuits (LIGHTING method)

In situations where access to circuit wiring is limited, the RT30 can also detect room lighting changes (ON to OFF).

1. Slide the transmitter power switch to the LIGHT position. The POWER LED will switch on.
2. Slide the Receiver power switch to the ON position. The POWER LED will switch on.
3. Cover the Light Sensor on the transmitter and press the Light Setpoint button.
4. Expose the Light Sensor to the light source. The VOLTAGE/LIGHT LED on the transmitter and the DETECT LED on the receiver will switch on
5. When the lights are turned off the VOLTAGE/LIGHT LED on the transmitter and the DETECT LED on the receiver will switch off, indicating the light has been switched off and power has been removed.



Test Equipment Depot, 99 Washington Street, Melrose, MA 02176
781.665.1400 | 800.517.8431 | Fax: 781.665.0780

Specifications

	Transmitter Unit	Receiver Unit
Indicators	LED	Audio Beeper, LED
Transmission Frequency	RT30 (914MHz) RT30-E (869MHz)	n/a
Transmission Distance	Approx. 328' (100m) in an unobstructed field	
Transmission Power	+10dBm	n/a
Alarm Status	Visual	Visual and audible
Power Supply	Two (2) 'AAA' batteries	Two (2) 'AAA' batteries
Battery Life	80 hours (approximately)	
Operating Temperature	14 to 122°F (-10 to 50°C)	
Storage Temperature	-14 to 140°F (-30 to 60°C)	
Operating Humidity	90% RH from 32-86°F (-10 to 30°C) 75% RH from 86-104°F (30 to 40°C) 45% RH from 104-122°F (40 to 50°C)	
Storage Humidity	90% RH max.	
Dimensions	4.0x2.4x1.5" (101x61x38mm)	4.5x1.17x 1.02" (114x30x26mm)
Weight	8.0 oz.(0.23 kg) – three (3) piece total	

Test Equipment Depot, 99 Washington Street, Melrose, MA 02176
781.665.1400 | 800.517.8431 | Fax: 781.665.0780

Maintenance

Battery Replacement

When the Power LED begins to dim, or the transmitter and receiver stop communicating, the batteries may need to be replaced. Each unit uses two (2) 'AAA' batteries (MN2400 or equivalent). The battery doors can be removed using a Philips screwdriver to loosen the attaching screw.

Calibration and Repair Services

Extech offers repair and calibration services for the products we sell. Extech also provides NIST certification for most products. Call the Customer Care Department for information on calibration services available for this product. Extech recommends that annual calibrations be performed to verify meter performance and accuracy.

FCC Part 15 (RT30)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Test Equipment Depot, 99 Washington Street, Melrose, MA 02176
781.665.1400 | 800.517.8431 | Fax: 781.665.0780