


FEATURES:

- ✓ Designed to fit on the end of any 22 AWG to 18 AWG wire.
- ✓ Cross hole wire entry fits wires up to .12" (3mm) diameter
- ✓ Available with tarnish resistant nickel or gold plating for very low contact resistance
- ✓ Model 5230 is rated to temperatures up to +302°F (+150°C)
- ✓ Set screw simplifies assembly of test leads and jumpers by using a flat blade screwdriver
- ✓ Fits standard panel and binding post banana jacks .161" to .166" (4,0mm to 4,2mm) diameter

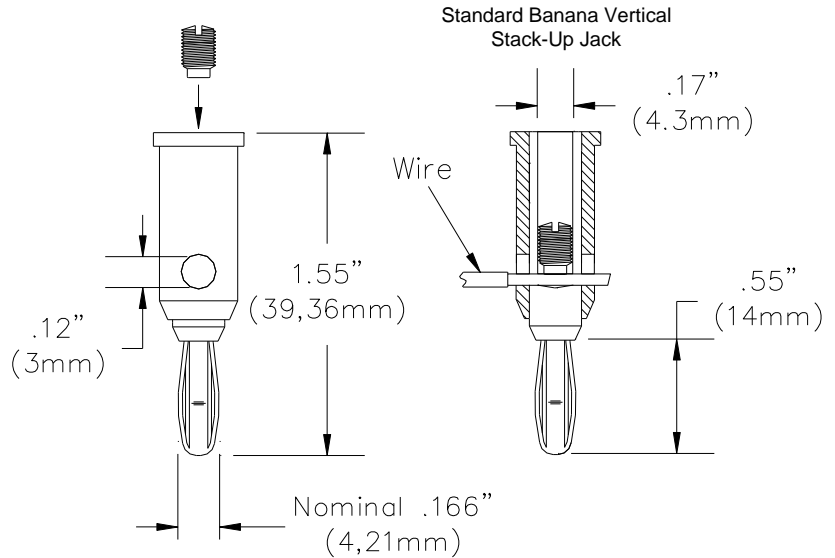

MATERIALS:

- Banana Jack: Beryllium Copper, Gold Plated
- Banana Plug: Body – Brass, Nickel Plated (Model 5406 Gold Plated)
Spring – Beryllium Copper, Nickel Plated (Model 5406 Gold Plated)
- Insulation: ABS (Model 5230 Polyphenylene Sulfide)
- Set Screw: Steel, Zinc Plated, 8-32 Single Slot

RATINGS:

- Voltage: Hands free testing in controlled voltage environments: 5000 Vrms Max. *For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.*
- Current: 15 Amps
- Maximum Operating Temperature: +122°F (+50°C). *Model 5230: +302 °F (+150 °C)*



ORDERING INFORMATION:

- Model: 1325-*color* Nickel Plated Banana with ABS Insulation
- Color:* 0=Black, 1=Brown, 2=Red, 3=Orange, 4=Yellow, 5=Green, 6=Blue, 7=Violet, 8=Gray, 9=White
- Ordering example: 1325-5 (1325 with green ABS insulation)*
- Model: 5406-0 Gold Plated Banana Plug with ABS Black Insulation
- Model: 5406-2 Gold Plated Banana Plug with ABS Red Insulation
- Model: 5230-0 Nickel Plated Banana with High Temperature Black Insulation (Polyphenylene Sulfide)
- Model: 5230-6 Nickel Plated Banana with High Temperature Blue Insulation (Polyphenylene Sulfide)
- Model: 6546 Package of ten 1325, one of each color.
- Model: 4914 Replacement Set Screws, package of 100.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.