




# 100 MHz CombiScope® HM1008-2

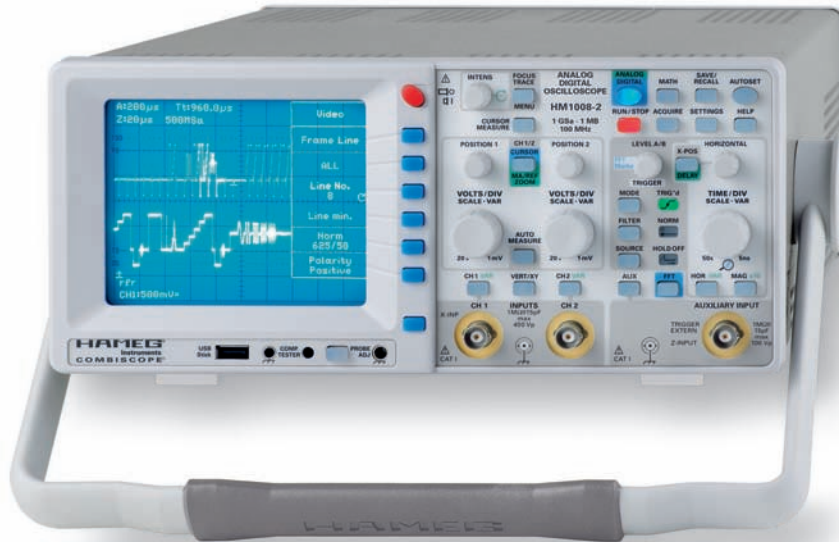


Either PAL or NTSC: Line triggering with line counter



Digital Mode: TV field and zoomed display of one selected line



Cursor measurement choices in digital mode



1 GSa/s Real Time Sampling, 10 GSa/s Random Sampling

1 MPt memory per channel Memory **Z**oom up to 40,000:1

Two Channels 1 mV – 20 V/cm

8-Bit Low Noise Flash A/D Converters

Pre/Post Trigger - 100 % to +400 %

Time Base 50 s/cm – 5 ns/cm

Acquisition modes: Single Event, Refresh, Average, Envelope, Roll, Peak-Detect

USB/RS-232, optional: IEEE-488, Ethernet/USB

Signal display: Yt and XY;

Interpolation: Sinx/x, Pulse, Dot Join (linear)

Analog Mode: see HM1000-2



# 100 MHz CombiScope® HM1008-2

Valid at 23 °C after a 30 minute warm-up period

## Vertical Deflection

<b>Channels:</b>	
Analog:	2
Digital:	2
<b>Operating Modes:</b>	
Analog:	CH 1 or CH 2 separate, DUAL (CH 1 and CH 2 alternate or chopped), Addition
Digital:	Analog Signal Channels CH 1 or CH 2 separate, DUAL (CH 1 and CH 2), Addition
X in XY-Mode:	CH 1
Invert:	CH 1, CH 2
Bandwidth (-3 dB):	2 x 0 - 100 MHz
Rise time:	< 3.5 ns
Overshoot:	max. 1%
Bandwith limiting (selectable):	about 20 MHz (5 mV/cm - 20V/cm)
Deflection Coefficients(CH1,2):	14 calibrated steps
1 mV - 2 mV/cm (10 MHz)	± 5% (0 - 10 MHz (-3 dB))
5 mV - 20V/cm	± 3% (1-2-5 sequence)
variable (uncalibrated):	> 2.5:1 to > 50V/cm
<b>Inputs CH 1, 2:</b>	
Input Impedance:	1 MΩ    15 pF
Coupling:	DC, AC, GND (ground)
Max. Input Voltage:	400V [DC + peak AC]
Y Delay Line (analog):	70 ns
Measuring Circuits:	Measuring Category I
<b>Analog mode only:</b>	
Auxiliary input:	AUX: 100V [DC + peak AC]
Function (selectable):	Extern Trigger, Z (unblank)
Coupling:	AC, DC
Max. input voltage:	100V [DC +peak AC]

## Triggering

<b>Analog and Digital Mode</b>	
<b>Automatic (Peak to Peak):</b>	
Min. signal height:	5 mm
Frequency range:	10 Hz - 200 MHz
Level control range:	from Peak- to Peak+
<b>Normal (without peak):</b>	
Min. signal height:	5 mm
Frequency range:	0 - 200 MHz
Level control range:	-10 cm to +10 cm
<b>Operating modes:</b> Slope/Video	
Slope:	positive, negative, both
Sources:	CH 1, CH 2, alt. CH 1/2 (≥ 8mm, analog mode only), Line, Ext.
<b>Coupling:</b>	
AC:	10 Hz-200 MHz
DC:	0-200 MHz
HF:	30 kHz-200 MHz
LF:	0-5 kHz
	Noise Rej. switchable
<b>Video:</b> pos./neg. Sync. Impulse	
Standards:	525 Line/60 Hz Systems 625 Line/50 Hz Systems
Field:	even/odd/both
Line:	all/line number selectable
Source:	CH 1, CH 2, Ext.
Indicator for trigger action:	LED
External Trigger via:	AUX (0.3V <sub>pp</sub> , 150 MHz)
Coupling:	AC, DC
Max. input voltage:	100V [DC +peak AC]
<b>Digital mode</b>	
Pre/Post Trigger:	-100% to +400% related to complete memory
<b>Analog mode</b>	
<b>2nd Trigger</b>	
Min. signal height:	5 mm
Frequency range:	0 - 200 MHz
Coupling:	DC
Level control range:	-10 cm to +10 cm

## Horizontal Deflection

<b>Analog mode</b>	
Operating modes:	A, ALT (alternating A/B), B
Time base A:	0.5 s/cm - 50 ns/cm (1-2-5 sequence)
Time base B:	20 ms/cm - 50 ns/cm (1-2-5 sequence)
Accuracy A and B:	± 3%
X Magnification x10:	to 5 ns/cm
Accuracy:	± 5%
Variable time base A/B:	cont. 1:2.5
Hold Off time:	var. 1:10 (LED-Indication)
Bandwidth X-Amplifier:	0 - 3 MHz (-3 dB)
X Y phase shift < 3°:	< 220 kHz
<b>Digital mode</b>	
<b>Time base range (1-2-5 sequence)</b>	
Refresh Mode:	20 ms/cm - 5 ns/cm
with Peak Detect:	20 ms/cm - 2 ms/cm (min. Pulse Width 10 ns)
Roll Mode:	50 s/cm - 50 ms/cm
<b>Accuracy time base</b>	
Time base:	50 ppm
Display:	± 1%
MEMORY ZOOM:	max. 40,000:1
Bandwidth X-Amplifier:	0 - 100 MHz (-3 dB)
X Y phase shift < 3°:	< 100 MHz

## Digital Storage

Sampling rate (real time):	Analog channels: 2x 500 MSa/s, 1 GSa/s interleaved
Sampling rate (random sampling):	10 GSa/s
Bandwidth:	2 x 0 - 100 MHz (random)
Memory:	1 M-Samples per channel
Operating modes:	Refresh, Average, Envelope/ Roll (Free Run/Triggered), Peak-Detect
Resolution (vertical):	8 Bit (25 Pts/cm)
Resolution (horizontal):	
Yt:	11 Bit (200 Pts/cm)
XY:	8 Bit (25 Pts /cm)
Interpolation:	Sinx/x, Dot Join (linear), Pulse
Delay:	1 Million x 1/Sampling Rate to 4 Million x 1/Sampling Rate
Display refresh rate:	max. 170/s at 1 MPts
Display:	Dots (acquired points only), Vectors (partly interpolated), optimal (complete memory weighting and vectors)
Reference Memories:	9 with 2 kPts each (for recorded signals)
Display:	2 signals of 9 (free selectable)

## FFT Mode

Display X:	Frequency Range
Display Y:	True rms value of spectrum
Scaling:	Linear or logarithmic
Level display:	dBV, V
Window:	Square, Hanning, Hamming, Blackmann
Control:	Center frequency, Span
Marker:	Frequency, Amplitude
Zoom (frequency axis):	up to x20

## Operation/Measuring/Interfaces

Operation:	Menu (multilingual), Autoset, help functions (multilingual)
Save/Recall (instrument parameter settings):	9
Signal display:	max. 4 traces
analog:	CH 1, 2 (Time Base A) in combination with CH 1, 2 (Time Base B)
digital:	CH1, 2 and ZOOM or Reference or Mathematics)
<b>USB Memory-Stick:</b>	
Save/Recall external:	
Instrument settings and Signals:	CH 1, 2, ZOOM, Reference and Mathematics
Screen-shot:	as Bitmap
Signal display data (2k per channel):	Binary (orig. ADC-Data), Text (ASCII- Format), CSV (Spread Sheet)

**Operation/Measuring/Interfaces**

<b>Frequency counter:</b>	
<b>6 digit resolution:</b>	>1 MHz – 250 MHz
<b>5 digit resolution:</b>	0.5 Hz – 1 MHz
<b>Accuracy:</b>	50 ppm
<b>Auto Measurements:</b>	
<b>Analog mode:</b>	Frequency, Period, Vdc, Vpp, Vp+, Vp-
<b>also in digital mode:</b>	$V_{rms}$ , $V_{avg}$
<b>Cursor Measurements:</b>	
<b>Analog mode:</b>	$\Delta t$ , $1/\Delta t$ (f), $t_r$ , $\Delta V$ , V to GND, ratio X, ratio Y
<b>plus in digital mode:</b>	$V_{pp}$ , $V_{p+}$ , $V_{p-}$ , $V_{avg}$ , $V_{rms}$ , pulse count
<b>Resolution Readout/Cursor:</b>	1000 x 2000 Pts, Signals: 250 x 2000
<b>Interfaces (plug-in):</b>	USB/RS-232 (H0720)
<b>Optional:</b>	IEEE-488, Ethernet/USB

**Mathematic functions**

<b>Number of Formula Sets:</b>	5 with 5 formulas each
<b>Sources:</b>	CH 1, CH 2, Math 1-Math 5
<b>Targets:</b>	5 math. memories, Math 1-5
<b>Functions:</b>	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV
<b>Display:</b>	max. 2 math. memories (Math 1-5)

**Display**

<b>CRT:</b>	D14-375GH
<b>Display area (with graticule):</b>	8 cm x 10 cm
<b>Acceleration voltage:</b>	approx. 14 kV

**General Information**

<b>Component tester</b>	
<b>Test voltage:</b>	approx. $7V_{rms}$ (open circuit), approx. 50 Hz
<b>Test current:</b>	max. $7mA_{rms}$ (short circuit)
<b>Reference Potential :</b>	Ground (safety earth)
<b>Probe ADJ Output:</b>	1 kHz/1 MHz square wave signal $0.2V_{pp}$ ( $t_r < 4$ ns)
<b>Trace rotation:</b>	electronic
<b>Line voltage:</b>	105 – 253V, 50/60 Hz $\pm 10\%$ , CAT II
<b>Power consumption:</b>	47 Watt at 230V, 50 Hz
<b>Protective system:</b>	Safety class I (EN61010-1)
<b>Weight:</b>	5.6 kg
<b>Cabinet (W x H x D):</b>	285 x 125 x 380 mm
<b>Ambient temperature:</b>	0° C ...+40° C

<b>Accessories supplied:</b>	Line cord, Operating manual, 2 Probes 10:1 with attenuation ID (HZ200), Windows Software for control and data transfer
<b>Optional accessories:</b>	
	H0730 Dual-Interface Ethernet/USB
	H0740 Interface IEEE-488 (GPIB)
	HZ70 Opto-Interface (with optical fiber cable)