


Model 5300 BNC (F) To Triaxial 3 Lug (M)

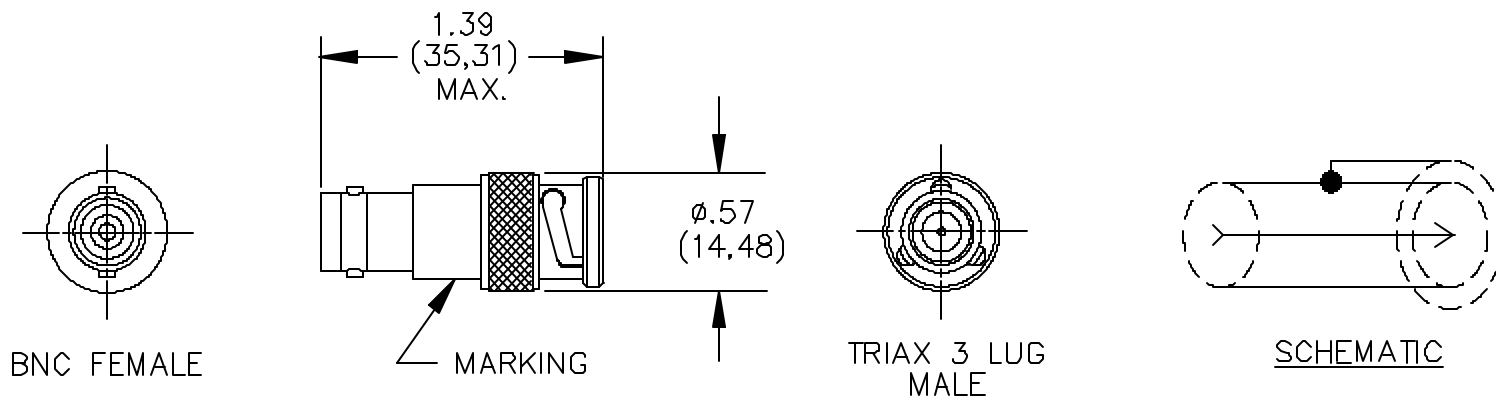

FEATURES:

- Provides an easy interface between a BNC (M) and a 3 lug triax (F)

MATERIALS:

Body and Fittings – Nickel Plated Brass, Male Contact – Gold Plated Brass, Female Contact – Gold Plated Beryllium Copper

Dielectric: Teflon per L-P-403

Finish: Body and Fittings: Tarnish resistant

Center & Intermediate contacts: Gold Plated

Outer Contact: Tarnish resistant

Marking: “Pomona 5300”

RATINGS:

Operating Voltage: Shield/Earth: 30VAC/60VDC Max. For hands free testing in a controlled Voltage Environment: 500 VDC.

Frequency Range: DC to 500 MHz.

ORDERING INFORMATION: Model 5300

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

