

# SKUTCH

"Telecommunication Products to solve Telecommunication Problems"

## CK-1P2 Promotion-On-Hold Adapter (For Panasonic KX-TG2740, KX-TG2730, and KX-T2720)

### Introduction

Thank you for purchasing the Skutch CK-1P2 Promotion-On-Hold Adapter for the Panasonic KX-TG2740, 30, 20 two line cordless phone system. The CK-1P2 is a true plug and play device. The unit does not require any "Learning" to operate. When a call is placed ON HOLD from the base set, or any one of the cordless phones, the caller will hear the Promotion-On-Hold audio. When the line is re-answered, the audio automatically stops. It's that simple!

**NOTE:** If you transfer a call to a Voice Mail Box after a call has been answered by a live person, Promotion-On-Hold will play over the message.

### Installation

1- Position the CK-1P2 box under the base telephone with the jacks facing towards the back of the phone. (See Fig. 1).

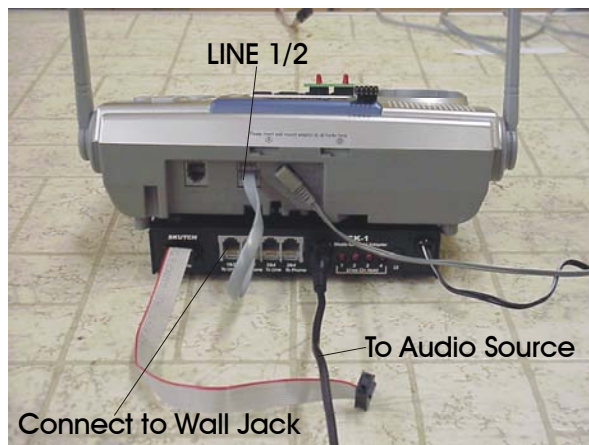


Fig. 1

- 2- Connect the short modular cord from [1&2 Phone on CK-1] to [LINE 1/2 on Phone].
- 3- Connect the audio cord from your audio source, to the AUDIO IN jack on the back of the CK-1 box. For DIGITAL units use the cable that comes with the player.
- 4- Connect a MOD cord from Telephone Wall Jack 1&2 to [1&2 Line on CK-1].
- 5- Locate the CK-1P2 "SENSOR BOARD", peel off the white protector papers from the bottom of the sensor board, and carefully place it OVER the LINE 1 and LINE 2 LEDs on the Panasonic base set as shown in Fig. #2. Make sure that the numbers on the sensor board are aligned to the middle of the select buttons on the phone.



Fig. 3

Fig. 2

6- Connect the Sensor Cable to the Sensor Board.

7- Connect the POWER CUBE from the CK-1 box to 115VAC power. That's it!

## Testing the System:

1- Pickup line 1 on your telephone. The No."1" LED on the CK-1P2 Sensor Board should light up.

2- Repeat this test for line 2. If both lines light up when picked up, the CK-1 is working properly. If either light does not light up, then

- a) Make sure that the CK-1P2 and Phone is connected to power.
- b) Make sure that the SENSOR BOARD is aligned properly.

## Lights on CK-1 Box.

When you place a line on HOLD, the corresponding LED on the rear of the CK-1P2 box lights up to confirm the Promotion-On-Hold condition.

## **Using Other models of telephones**

The CK-1P2 will ONLY provide Promotion-On-Hold audio when a call is placed ON HOLD from the KX-TG2740 base or any of its cordless telephones. Other models of telephones can be used with the KX-TG2740, but the Promotion On Hold audio will not be played to calls placed ON HOLD from these telephones.

## **• ONE YEAR LIMITED WARRANTY**

This SKUTCH PRODUCT is warranted against defects for a period of one (1) year from the date of the original invoice. Within this period, we will repair it without charge for parts and labor. To obtain warranty service the product must be returned, at the customer's expense, to SKUTCH Electronics along with a copy of the original invoice. After the unit has been repaired, SKUTCH will ship the PRODUCT back via UPS GROUND service at our expense. If any other form of return shipment is requested, the customer will pay for 100% of the shipping cost.

This Warranty does not apply if in the sole opinion of SKUTCH Electronics, the PRODUCT has been damaged by lightning or any other Acts of God, or by accident, misuse, neglect, or improper packing, shipping, modification or servicing by other than an authorized SKUTCH Service Center.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IN NO EVENT SHALL SKUTCH ELECTRONICS BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS WARRANTY OR OTHERWISE.