



"Telecommunication Products to solve Telecommunication Problems"

CK-1A3 Promotion-On-Hold Adapter (For AT&T EP5962)

Introduction

Thank you for purchasing the Skutch CK-1A3 Promotion-On-Hold Adapter for the AT&T EP5962 two line cordless phone system. The CK-1A3 is a true plug and play device. The unit does not require any "Learning" to operate. When a call is placed ON HOLD from the base set, or any one of the cordless phones, the caller will hear the Promotion-On-Hold audio. When the line is re-answered, the audio automatically stops. It's that simple!



Installation (Single Mod Cord)

1- Turn the phone upside down and connect the short modular cable from the CK-1A3 box to the AT&T EP5962 telephone jack that is labeled "LINE 1/ L1+L2". (See Fig. 1).

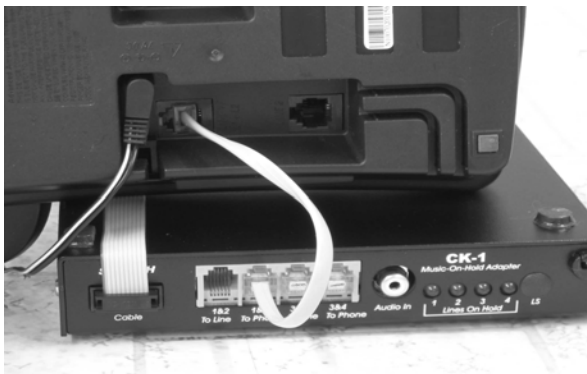


Fig. 1



Fig. 2

2- Set the phone on the CK-1A3 box as shown in Figure #2.

3- Connect the audio cord from your audio source, to the AUDIO IN jack on the back of the CK-1 box. For DIGITAL units use the cable that comes with the player, not ours.


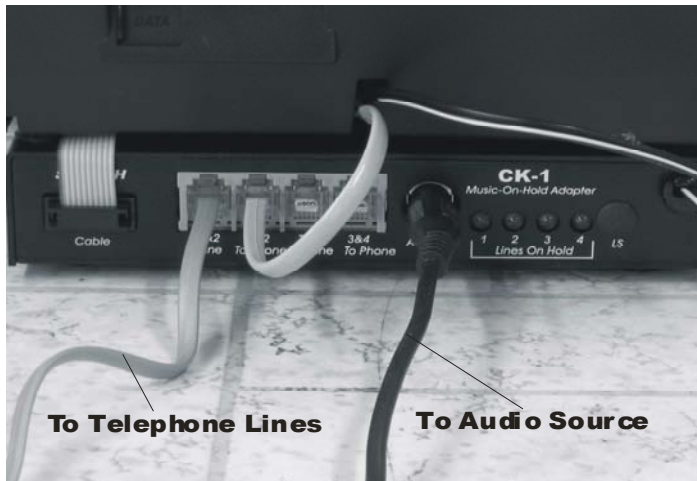


Fig. #3

4- Connect a MOD cord from Telephone Wall Jack 1&2 to [1&2 Line on CK-1A3], as shown in Fig. #3.

5- Locate the CK-1A3 "SENSOR BOARD", peel off the protector paper from the bottom of the sensor board, and carefully place it OVER the LINE buttons on the phone set as shown in Fig. #4. The buttons on the SENSOR BOARD MUST be centered directly over the line 1 and 2 selector buttons on the phone. The SENSOR BOARD MUST be attached to the phone for proper operation.

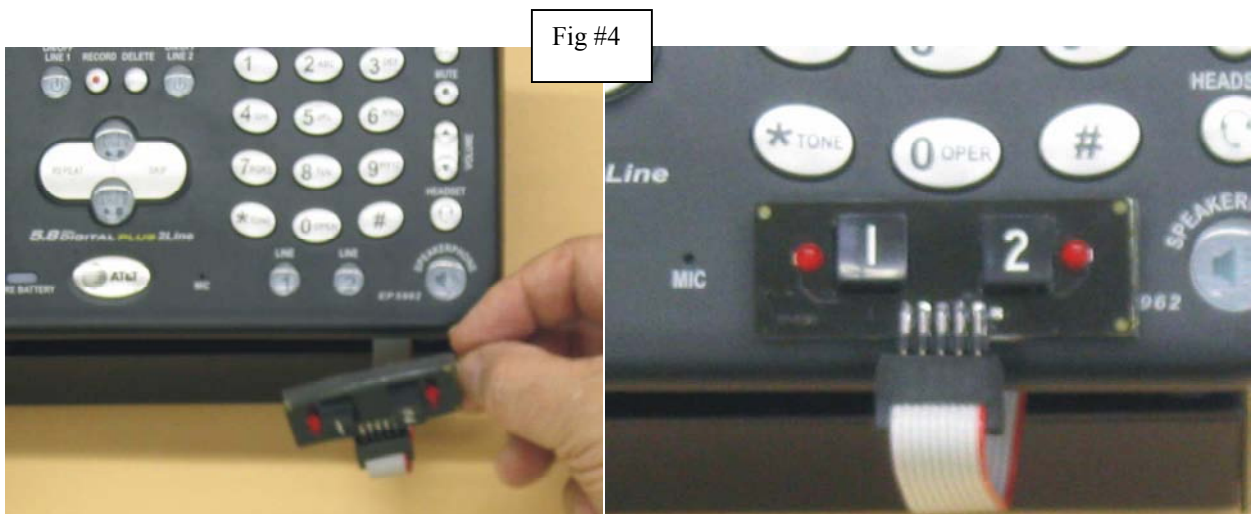

6- Connect the Sensor Cable to the Sensor Board as shown in Fig. #4. Make sure that the “Down” sticker on the “Flat Cable” connector faces down.

7- Connect the POWER CUBE from the CK-1 box to 115VAC power. That's it!

Installation (Two Mod Cords)

If your phone is installed with two telephone cords, one for line 1 and another for line 2, then you will have to use the enclosed adapter to convert the two separate cords to a single double line cord. Once this is done you can follow the Installation (Single Mod Cord) instructions.



Testing the System:

1- Pickup line 1 on your telephone. The No."1" LED on the CK-1A3 Sensor Board should light up. Hang up.

2- Repeat this test for line 2. If both lines light up when picked up, the CK-1A3 is working properly. If either light does not light up, then

- a) Make sure that the CK-1A3 and Telephone is connected to power.
- b) Make sure that the SENSOR BOARD is aligned properly.



Lights on CK-1 Box.

When you place a line on HOLD, the corresponding LED on the rear of the CK-1A3 box lights up to confirm the Promotion-On-Hold condition.

Using Other models of telephones

The CK-1A3 will ONLY provide Promotion-On-Hold audio when a call is placed ON HOLD from the AT&T EP5962 base or any of it's cordless telephones. Other models of telephones can be used with the AT&T EP5962, but the Promotion On Hold audio will not be played to calls placed ON HOLD from these telephones.