


New

INFRARED THERMO HiTESTER 3419-20

Environmental measuring instruments 

Pistol design with easy-to-see display
Measuring couldn't be easier !



Measure safely even in dangerous places



Easy Measurement in difficult locations



Moving objects that can't be touched



Wherever there is danger of electric shock



LCD

Laser Marker

Trigger

Simple, one-hand operation

Strap



Backlight for operating even in the dark

- Easy Battery Replacement
- F/C Selectable
- Audible Alarm Feature



ISO 9001
JMM-0216



ISO 14001
JQA-E-90091

One-touch measurement – just pull the trigger



Begin measuring




Useful Functions

- Max/Min Function
- Upper and Lower Alarm Setting
- Stores up to 50 measurements
- Auto Power Off
- Backlight

Specifications

Detection element	Thermopile
Measurement temperature range	-35 to 500 °C (-31 to 932 °F)
Display resolution	0.1 °C (0.2 °F)
Response time	2 times/ second
Measurement wavelength	6 to 14 μm
Thermal emissivity compensation	0.17 to 1.00 by steps of 0.01
Diameter of field of measurement	125 mm at 1000 mm (D : S= 8 : 1)
Sighting	Laser marker MAX 1 mW (class 2), Red
Low-battery warning	The low-battery indicator appears when voltage falls below 7.0 V.
Power supply	6F22 manganese battery × 1 or 6LR61 alkaline battery × 1
Continuous operating time	Approx. 55 hours (manganese battery), Approx. 80 hours (alkaline battery), When laser marker and backlight are OFF
Accuracy	± 2 % rdg. or ± 2 °C, 4 °F whichever value is higher.
Temperature coefficient	Measurement accuracy × 0.1/ °C
Dimensions	Approx. 46 W × 172 H × 118 D mm (1.81" W × 6.77" H × 4.65" D)(excluding projections)
Mass	Approx. 220 g (7.8 oz.) (including manganese battery × 1)
Location for use	Indoors, altitude up to 2000 m (6562-ft.)
Operating temperature and humidity	0 to 50°C (32°F to 122°F), 80%RH or less (non-condensating)
Storage temperature and humidity	-10 to 50°C (14°F to 122°F), 80%RH or less (non-condensating) 50 to 60°C (122°F to 140°F), 70%RH or less (non-condensating)
Applicable standards	EMC : EN61326 Laser : IEC60825-1 CLASS 2 LASER
Additional Function	MAX/ MIN display, Alarm function, Backlight function, Memory (50 data)
Accessories	Instruction manual, 6F22 manganese battery × 1(supplied with this product for monitor), Carrying case × 1

Measurement focus

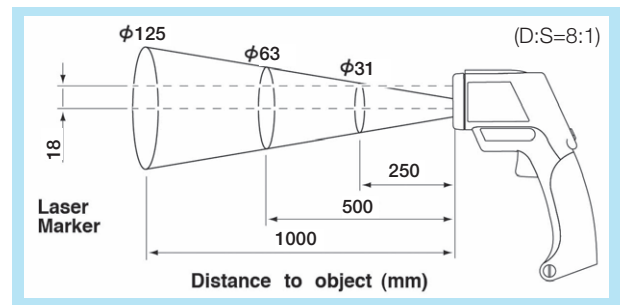

Option

Black body tape

(50 mm × 10 m, 1 roll) Withstands 180°C ε=0.95

*Optional use of black body tape allows increased emissivity in order to obtain accurate temperature measurements on low-emissivity materials such as metals.



Accessories
Carrying case

Laser Product Caution Notice

A caution label is attached to the HiTester. Be sure to observe the operating precautions on the label.

