


## OVF-1

### “Pen-size” Visual Fault Locator

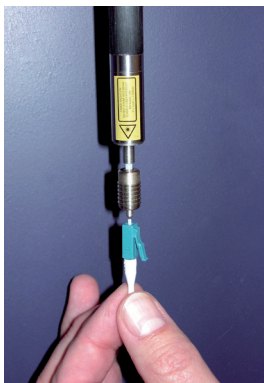

#### Key Features

- Rugged metal housing, pen-size format
- Lightweight
- Universal push-pull interfaces (UPP) for 2.5 mm and 1.25 mm
- Visible laser light at 635 nm
- Usable with single-mode and multimode fibers
- Range >5 km
- CW and blink modes
- Long battery life (>40 hours)

#### Fault location in fiber optics networks

The OVF-1 is specially designed for field personnel who need an efficient and economical tool for fiber tracing, fiber routing and continuity checking in an optical network during and after installation.

Fiber breaks, microbends, and poor optical splices are clearly visible as light glows through the fiber buffer or outer jacket.

Fault location behind optical connectors where the use of OTDRs is limited due to dead zones is now possible with the OVF-1.

The blink mode improves visibility for use in bright ambient light. The highly efficient laser diode operates at short wavelengths of 635 nm to ensure that the emitted light is clearly visible to the human eye. Fibre tracing is possible over more than 5 km for single-mode fibers.

With the new universal push-pull (UPP) adapter, matching of all standard 2.5 mm optical connector types is possible. The connector is held without additional mechanical fixing.

An additional external adapter converts from 2.5 mm UPP to .125 mm UPP. This adapter allows to connect the OVF-1 to optical connectors with 1.25 mm ferrule e.g. LC, MU or F3000.

The OVF-1 comes in a rugged metal housing. With its compact, lightweight design, it fits easily in a vest pocket.

---

**Specifications**

|                            |   |
|----------------------------|---|
| Wavelength                 | approx. 635 nm  |
| Power output               | approx. -5 dBm<br>(SMF-28 Fiber, Class II Laser Product)  |
| Optical connector          | universal push pull adapter<br>(UPP) for standard 2.5 mm connector systems.<br>External 1.25 UPP adapter for any 12.5 mm connector system |
| Power                      | 2 AAA alkaline batteries,<br>(>40 hours battery life)   |
| Blink mode                 | 2 to 3 Hz   |
| <i>Ambient temperature</i> |   |
| Operating range            | -10°C to +45°C  |
| Storage range              | -40°C to +70°C  |
| Dimensions                 | 170 × 13 mm   |
| Weight                     | approx. 50 g (incl. batteries)  |

---

**Ordering information**

|            |                            |
|------------|----------------------------|
| BN 2252/01 | OVF-1 visual fault locator |
| BN 2252/02 | Adapter 1.25 mm for OVF-1  |

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its applications. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. © 2005 JDS Uniphase Corporation. All rights reserved. 10143298 500 0707 OVF-1.DS.FOP.TM.AE