

DIGITAL STORAGE OSCILLOSCOPES

Digital Storage Oscilloscopes

DCS-7000 SERIES

40MS/s 2 Acquisition (Readout Cursors)

DCS-7040

20MS/s 2 Acquisition (Readout Cursors)


DCS-7020

OUTLINE

With the storage menu and triggering function concentrated to assure safe use by anyone engaged in the production and a clear panel layout showing operations at a glance, the DCS-7000 Series of oscilloscopes are easy-to-use models even for beginners in spite of the many, versatile functions packed in each unit. The maximum sampling rate of 40 MS/s (DCS-7040) enables advanced waveform observations, and an analog function (50 MHz) is also incorporated so that each model can play two roles of digital and analog. Each channel has a 4K-word acquisition memory. The peak detector and overwriting functions are provided in pursuit of a compatibility between the ease of use and the high functionality. Optional interfaces can also be installed so the waveforms displayed on the CRT can be hard-copied on a plotter or a special printer.


FEATURES

- (1) Maximum sampling rate of 40 MS/s (DCS-7040; 20 MS/s with the DCS-7020) allows advanced waveform observations.
- (2) 4K-word acquisition memories and 2K-word reference memories (backed up by a built-in battery) are provided.
- (3) The peak detector function can detect glitch with pulse duration of 25 ns or more.
- (4) The overwriting function makes for easy measurements of jitter, voltage variation, etc.
- (5) The external clock input can be used to sample asynchronous low-speed signals as required.




[Overwrite] This mode allows you to write an input waveform without erasing the previously written waveforms. It makes the observation of the jitter components in, and amplitude variations of waveforms easy.

GP-IB
OPTION

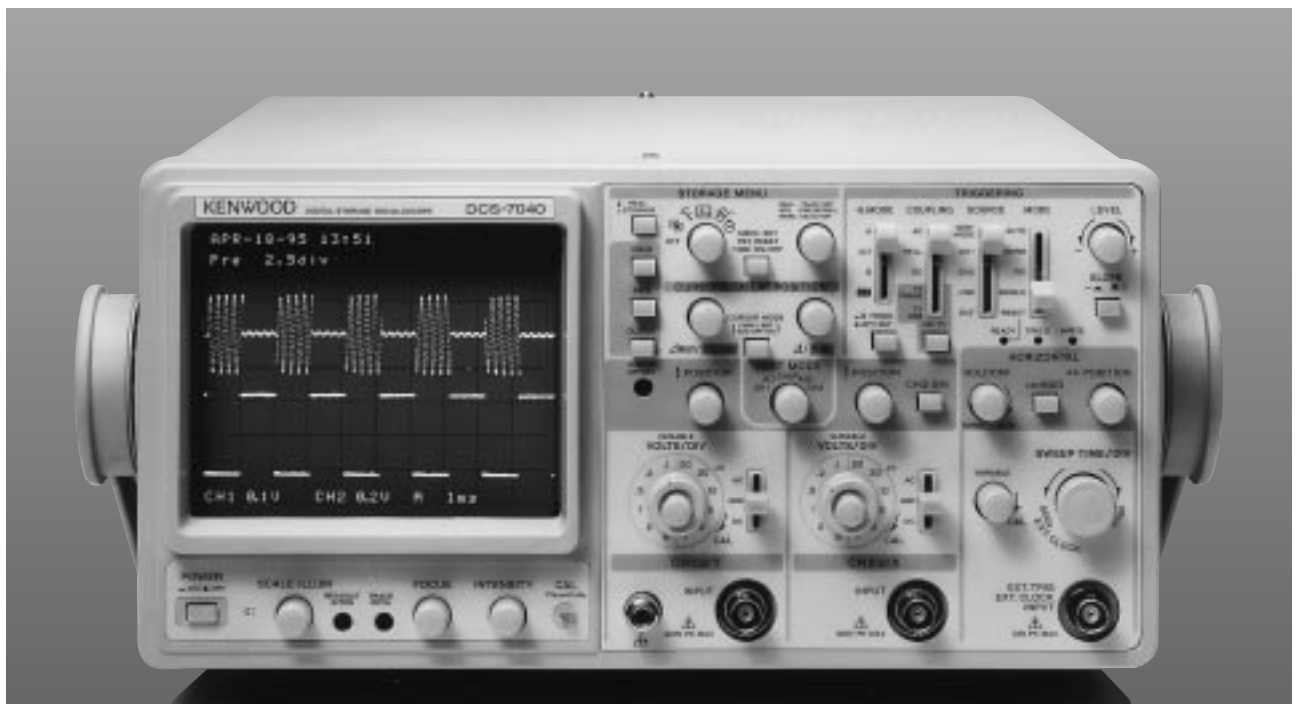


DCS-7000 SERIES


DCS-7000 SERIES DIGITAL STORAGE OSCILLOSCOPES




[Single roll] Setting "Single" in the roll mode enters the single roll mode. When the trigger signal is input in this mode, the CRT display waveform stops after the data corresponding to the value set for pre-triggering has been updated.

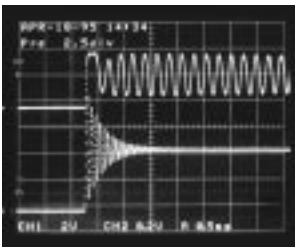


[Pre-triggering] The triggering for storage includes pre-triggering of up to 20 div in addition to normal triggering and delayed-sweep triggering. This makes it possible to observe phenomena which have previously been unable to be captured.



[2-channel simultaneous sampling] The 2-channel simultaneous sampling at the maximum sampling rate of 40 MS/s (DCS-7040; 20 MS/s with the DCS-7020) makes for easy waveform observations of single-shot phenomena, transient phenomena, sudden phenomena, etc.



[Peak detector] (1) The peak detector function detects the maximum and minimum values of signal waveforms. This mode is capable of detecting glitches of 25 ns or more regardless of the sweep rate.



(2) The peak detector function allows you to observe the envelopes of amplitude-modulated signal waveforms.

Memory


Each CH1 and CH2 is equipped with a 4K-word acquisition memory and a 2K-word reference memory. Each acquisition memory can scroll the desired position and display it on the CRT.

External clock input

Sampling can be performed in synchronism with the externally input clock signal. This allows waveform observations synchronized with signals with inconstant period, such as encoder pulse and rotary object signals.

Optional interfaces

Both the DCS-7040 and DCS-7020 can be equipped optionally with GP-IB or RS-232C interface. This allows you to hard-copy the CRT display waveforms on a plotter or a special printer as they are.

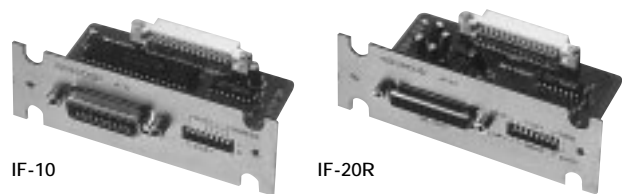

IF-10

IF-20R

SPECIFICATIONS

Figures inside [] are the values for the DCS-7020; all other values are common.

[Real-time section]

CRT

Type	150mm rectangular, with internal graticule
Accelerating voltage	Approx. 12kV
Effective area	8div. x 10div. (1div = 10mm)
Vertical axis (Common for	CH1, CH2)
Operating modes	CH1, CH2, ADD, ALT, CHOP
Sensitivity	1mV/div., 2mV/div. : ± 5% 5mV/div. to 5V/div. : ± 3%
Attenuator	1mV/div. to 5V/div., 1-2.5 step, (fine adjustment)
Input impedance	1MΩ ± 2%, approx. 25pF
Frequency response	
DC	DC to 50MHz, (- 3dB) (5mV/div to 5V/div.) DC to 20MHz, (- 3dB) (1mV/div, 2mV/div.)
AC	5Hz to 50MHz, (- 3dB) (5mV/div to 5V/div.) 5Hz to 20MHz, (- 3dB) (1mV/div to 2mV/div.)
Rise time	Approx. 7ns (5mV/div. to 5v/div.) Approx. 17.5ns (1mV/div., 2mV/div.)
Crosstalk	Below - 40dB (at 1kHz)
Polarity inversion	CH2 only
CHOP Frequency	Approx. 250kHz
Maximum input voltage	800Vp-p or 400V (DC + AC peak)
Horizontal axis	
Operating modes	Set to X-Y mode by H MODE CH1 : Y-axis, CH2 : X-axis
Sensitivity	Same as Vertical axis (CH2)
Input impedance	Same as Vertical axis (CH2)

DIGITAL STORAGE OSCILLOSCOPES

Frequency response

DC	DC to 1MHz, within - 3dB
AC	5Hz to 1MHz, within - 3dB
X-Y phase difference	Below 3 degrees at 50kHz
Maximum input voltage	Same as vertical axis (CH2)
Sweep	
Sweep modes	A sweep. B sweep, ALT
Sweep time	
A	0.5s/div to 0.1µs/div ± 3% in 1-2-5 steps, 21 ranges, and fine adjustment
B	50ms/div to 0.1µs/div ± 3% in 1-2-5 steps, 18 ranges
Magnified sweep	× 10 ± 5% (± 8% at 0.5 µ s/div)
Linearity	± 3% (10MAG ± 5%)
Delay method	Continuous delay, synced delay
Delay time	0.5s/div to 0.1µs/div ; continuously variable from 0.2div. ~ 10div.
Delay time error	± (3% of set value + 1% of fs.) + (0 to 300ns)
Delay jitter	10,000 : 1 of 10 times of the A sweep time
Hold off	A Sweep : Continuously variable from NORM
Trace separation	B separation from A is continuously adjustable to approx. ± 4 div.

Triggering

Trigger sources	VERT, CH1, CH2, LINE, EXT
Mode	AUTO, NORM, FIX, SINGLE
Trigger coupling	AC, HFrej, DC, TV-FRAME, TV-LINE
Trigger sensitivity	

Trigger coupling	Synced range frequency range	Internal sensitivity (amplitude)		External sensitivity (amplitude)	
		NORM	FIX	NORM	FIX
DC	DC to 20MHz	1div.	1.5div.	100mV	150mV
	20MHz to 50MHz	1.5div.	2div.	150mV	200mV
AC	10Hz to 20MHz	1div.	1.5div.	100mV	150mV
	20MHz to 50MHz	1.5div.	2div.	150mV	200mV
HFrej	Minimum triggering amplitude increases above 10kHz				
TV	TV-F, TV-L Comp.video	1.5div.	1.5div.	150mV	150mV

Calibration voltage	1Vp-p ± 3% (positive polarity, approx. 1kHz, square wave)
Intensity modulation	
Input voltage	TTL level (+5V) diminishes as positive polarity
Input impedance	Approx. 10kΩ
Frequency range	DC to 3.5MHz
Input range	100Vp-p or 50V (DC + AC Peak, 1kHz or under)
CH1 Signal output	
Output voltage	Approx. 50mVp-p/div
Output impedance	Approx. 50Ω
Frequency response	5mV to 5V/div. : 100Hz to 50MHz (- 3dB) 1mV to 2mV/div. : 100Hz to 20MHz (- 3dB)
Trace rotation	Enables trace rotation adjustment by semi-fixed controller on the panel

[Storage section]

Vertical axis	
Vertical resolution	8bit (25dot/div.)
Dynamic range	± 5div
Effective storage frequency	
DC	DC to 16MHz [8MHz] (sine interpolation)
AC	5Hz to 16 MHz [8MHz] (sine interpolation)
Rise time	Below 40ns [80ns] (With linear interpolation)

Memory capacity

NORM sampling	
Display memory (data)	2KW/CH (200dot/div)
Display memory (REF)	2KW/CH
Acquisition memory	4KW/CH
REF memory	2KW/CH
Roll mode	
Display memory (data)	2KW/CH (200dot/div.)
Display memory (REF)	2KW/CH
Acquisition memory	4KW/CH
REF memory	2KW/CH
Memory backup	Battery backed up for approx. 30,000 hrs. (at normal temperature)
Acquisition memory	4KW/CH
REF memory	2KW/CH
Sweep time • Display mode	
NORM sampling	0.1µs/div. to 500s/div. (0.1µs/div. to 2µs [5µs]/div. in the MAG range) (Maximum sampling rate : 40MS/s [20MS/s])
Peak detector	10µs [20µs]/div. to 500s/div.
Roll mode	0.2s/div. to 500s/div.
Storage mode	
AUTO	Same operation as NORM for the same period, free-running data updating in other cases.
NORM	Data updated each time an acceptable trigger is received.
SINGLE	Data is stored with the first acceptable triggering after resetting and held
AVG (Averaging)	Average of 4 or 16 or 64 times
SMT (Smoothing)	Data writing point will be averaged following 32 words.
PST (Persistence)	Mutual display of maximum and minimum values in storage, and initialization by PST RESET.
PEAK	25ns glitch detection
ROLL	NORM : Continuous recording and updating of data on the CRT. SINGLE : After receiving the acceptable trigger, the pre-triggering data is updated and the data is stored.

Magnification, Compression

Magnification	By pressing X10 MAG under Hold conditions, 10-times magnification is obtained by linear interpolation around the CRT center.
Interpolation	Linear interpolation, sign interpolation
Trigger • Delay	
Pre-trigger	NORM : 0 to 20div. (in 2.5div steps) ROLL-SINGLE : 10div. to 20div. (in 2.5div steps)
Usage of B triggering	AFT.DLY : B STARTS AFTER DELAY TIME B TRIG'D : B TRIG'D AFTER DELAY TIME
X - Y	
Effective storage frequency range	DC to 16MHz [8MHz] (- 3dB) Adjustable sampling rate for the SWEEP TIME /DIV.)

DCS-7000 SERIES

External clock Carries out sampling by first transition of signals input from the external clock terminal when setting SWEEP TIME/DIV to EXT.

Input impedance $1M\Omega \pm 2\%$, Approx. 25pF

Maximum input voltage 100Vpp or 50V (DC+AC peak, 1kHz or below)

Input signal level TTL "L" level + 0.4V or less
"H" level + 3.2V or more

Input signal frequency range DC to 1MHz (1 kHz in roll mode)

Input signal duty ratio 20% to 80% (at "L" level + 0.4V, "H" level + 3.2V)

Waveform calculation +, -
PLOT OUT (Display hardcopy)

Usage of RS-232C

Output HP-GL command, CRT display hardcopy (only data transfer)

Baud rate 9600/1200 bps

Transfer type data length = 8bit, no parity
stop bit = 1bit or more

Signal

FG (Frame Ground)	Frame ground	
SD (Send Data)	Send data	Plotter
RD (Receive Data)	Receive data	Plotter
RS (Request to Send)	Request to send	Plotter
CS (Clear to Send)	Clear to send	Plotter
DR (Data Set Ready)	Data set ready	Plotter
ER (Data Terminal Ready)	Data terminal ready	Plotter
SG (Signal Ground)	Signal ground	

Connections DCS-7000 side Plotter side

1 Shield	————	1 Shield	
2 Blue	————	2 Red	SD
3 Red	————	3 Blue	RD
4 Gray	————	4 Yellow	RS
5 Brown	————	5 Green	CS
6 Yellow	————	6 Gray	DR
7 Black	————	7 Black	SG
8	————	8	
20 Green	————	20 Brown	ER

[Readout section]

Display Capable of NO/OFF by pressing and holding the CURSOR MODE switch for about 1 second.

Calendar

Display Year / month / day / hour / minute

Clock accuracy ± 2 minutes/month

Battery life Approx. 30,000 hours (at room temperature)

Setting values

Vertical axis related items CH1, CH2 scale factors (with probe detector)
V-UNCAL, ADD, INV

Horizontal axis related items (A, B) sweep scale factor (MAG conversion),
 $\times 10$ MAG, X-Y, external clock
SWEEP VARIABLE UNCAL

Trigger-related items DELAY TIME, B TRIG' D

Storage related items X-Y sampling rate, display scroll, setting storage function (kind of PEAK, AVE and count, SMT, PST, ROLL, kind of interpolation pre-trigger, point, REF memory setting condition, menu, OUTPUT)

Cursor measurement

Cursor modes $\Delta V1, \Delta V2, \Delta T, 1/\Delta T, \text{RATIO (V or H)}$
PHASE (at VARI UNCAL)

Measuring resolution 10bit

Measuring accuracy $\pm 4\%$

Measurement range

Vertical direction ± 3.6 div. or more at center of CRT

horizontal direction ± 4.6 div. or more at center of CRT

Power source section

Line voltage /Frequency AC100/120/220/230V $\pm 10\%$ / 50/60Hz

Power consumption Approx. 57W, approx. 69VA (with optional IF-10 <GP-IG interface > installed)

[Other]

Case dimensions 305 (W) \times 150 (H) \times 400 (D) mm

Maximum dimensions 347(W) \times 165 (H) \times 459 (D) mm

Weight Approx. 9.6kg

Temperature/humidity 10 to 35 , 85% or less

for characteristics in spec. (without condensation)

Temperature/humidity 0 to 40 , 85% or less

for operation (without condensation)

Accessories

Probe PC-53 (2)

Power cable (1)

Instruction manual (1)

Alignment tool (1)

[Options]

OUT PUT Makes possible mounting of optional IF-10 or IF-20 (but simultaneous mounting is not possible).

IF-10 GP-IB (complies with IEEE-488 1978)

Operation Outputs screen numerical data and screen readout data through GP-IB interface computer. (TALK ONLY, HP-GL command). Plot out the screen waveform and screen readout data to the GP-IB interface plotter.

IF-20R EIA RS-232C interface

Operation Prints out screen waveform and screen readout data with an RS-232C printer (only model DPU-412 made by Seiko Electronics, Ltd.). Outputs screen waveform data and screen readout data to the RS-232C interface computer.

Baud rate 9600/1200bps

Transfer type Data length = 8 bits without parity

Stop bit length = 1 bit or more

Delimiter = CR + LF

Handshake = CTS-RTS system