



The RECON is the first true 21st century telecommunication line analyzer. It is a field instrument that delivers more information of online conditions & status than any other test set on the market, anywhere in the world!

- Advanced data detection & identification
- Large backlit display for low light environments
- Glow-in-the-dark keypad
- 100% Data Safe
- Rugged weatherproof case, IP54 Standard
- Drop Proof (drop tested at 20ft)

Features:

- Multilingual (English, French, Spanish)
- Speaker with fine volume adjustment
- Adjustable earpiece volume, hearing aid compatible
- Noise cancelling microphone
- Microphone mute with toggle On/Off locking feature
- Soft key menu system
- Cushion boot for extra protection
- Backlight 0 to 100% adjustable with On/Off option

Functions:

- · Off-hook current and polarity
- · On-hook voltage and polarity
- Ring amplitude and frequency
- On-hook and call waiting Caller ID info
- Amplified Line Monitor for volume levels comparable to "off-hook" operation
- 8 number Stored memory with Alpha/Numeric tags
- Fuel Gauge Battery condition
- Continuous Polarity Indication
- Caller ID/Call Waiting and Caller ID error detection
- Tone and Pulse dialing
- · Configurable Auto Off in all modes
- Detects and identifies DSL and T1 lines
- Last number dialed, redialed or received

See reverse for additional information.

Phone: 800.749.5783 Fax: 800.749.5784 806 Calle Plano


Camarillo, CA 93012

www.platinumtools.com

We Make Connections EZ!





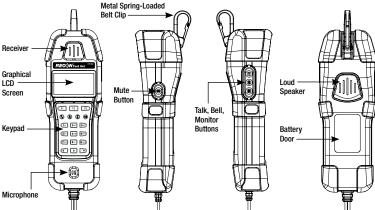



Hanging Pouch P/N 4007Durable pouch for safe storage and transport of your tester.

Ordering Information:

Description	P/N	UPC CODE
RECON Test Set	T62	849160004943
Hanging Pouch	4007	894160004899

RECON Includes

- RECON Test Set
- 60 inch Bed-of-Nails- Cord Set
- 4 x AAA Alkaline Batteries

Digital Protection Features:

- Data DefenderTM Data line-in-use capability (Data Defender is a trademark of Independent Technologies)
- High line voltage detection with next step options
- · Data measurement options
- Active monitor circuitry minimizes load on subscriber line
- DTMF digit detection and display in monitor mode
- · Detects DSL and T1 lines
- DigitViewTM, DTMF decode sees defects on customer equipment while dialing out
- PwrSave[™] circuitry for Extra Long battery life

Specifications:

Physical Dimensions:	: Without belt clip and cord set:	
	Size: 8.25" x 2.5" x 2.0" (21 x 6.4 x 5.1 cm)	
Weight:	With battery, cord set and belt clip 19.74 oz. (559.7 grams)	
Interface:	Attached cord set, 60"	
Languages:	English, Spanish and French	
Ringer Equivalence:	In BELL mode: 0.0 (no ringer load)	
Pulse Dialing:	Pulse rate: 10 pps ± 10%; Make/break ratio: 60% to 40% ±2%; USA Interdigit interval: 820 ms; Resistance during break: 120K Ohms minimum	
Tone Dialing:	DTMF output (into 600 Ohms): Tone-frequency error: ±1.5%; Tone Level: High group: -6 ±2 dBm; Low group: -8 ±2 dBm; High group vs. Low group Difference (twist): 2 ±1 dBm	
Flash Duration:	600 ±50 ms	
Pause Duration:	Tone: 3 seconds; Pulse: 3.4 seconds	
Memory:	8 programmable locations, 32 digits with 12 character tag, stored in non-volatile memory. Last number redial plus list of last 10 numbers dialed.	
Return Loss:	Minimum 14 dB at 600 Ohms	
Line-Current Range:	10 to 110 mA	
Apparent Line Resistance:	275 Ohms at 20 mA	
Monitor Mode Impedance:	DC: 1MΩ typical - AC: 390 KΩ at 1 KHz typical	
Measurement:	Voltage: 0 to 200 VDC $\pm 5\%$; Current: 10 to 110 mA $\pm 5\%$; NOTE: Do not attach test set to electric-power lines	
User Controls:	(1) Left-side-mounted TALK/BELL/MON push button switches for operating modes; (1) Right-side-mounted microphone mute pushbutton (4) Front-mounted pushbuttons for various options; (1) Standard front-mounted 12-key phone keypad	
Display:	Transflective 128 by 64 pixel graphical liquid crystal display (LCD) with LED backlight	
Power:	4 x AAA alkaline batteries	
Battery Life:	With 100% backlight and in speaker mode - 20 hours Backlight off and speaker off - 75 hours Standby - 2 years	





Disposal information: Do not place equipment and/or accessories in trash. Items must be properly disposed of in accordance with local regulations



Phone: 800.749.5783 Fax: 800.749.5784

806 Calle Plano Camarillo, CA 93012 www.platinumtools.com

We Make Connections EZ!

©2012 Platinum Tools, Inc. All rights reserved, RECON Test Set PS T62 PF REV2 7/12