





Visit us at www.TestEquipmentDepot.com

MODEL C-322

Datalogging sound level meter.

- IEC651 Type II
- Auto-ranging from 30 to 130 dB
- Dynamic range of 50 dB
- 32,000 record data logger
- 4-digit backlit display
- Clock and bar graph displays
- Auto power off
- AC and DC output
- Max/Min function
- Includes battery, manual, carrying case, calibration screwdriver, windscreen, RS232 cable, and Windows datalogging software

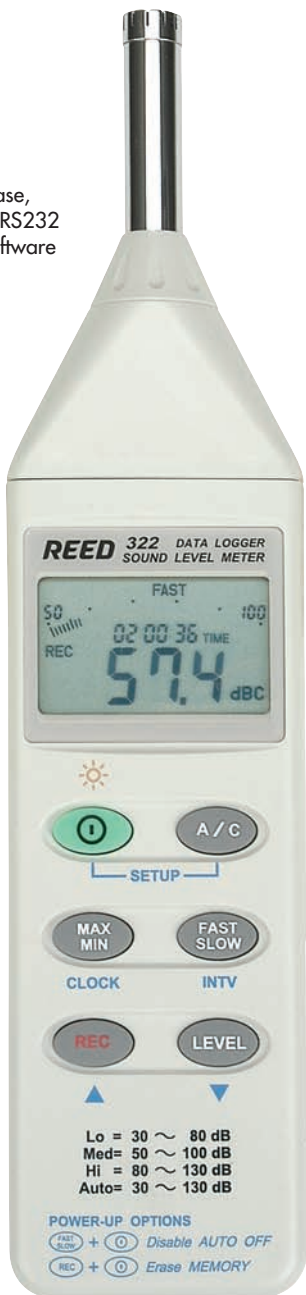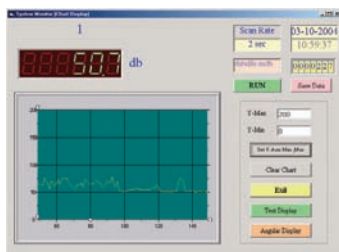

Range: 32 to 80, 50 to 100, 80 to 130 dB
Resolution: 0.1 dB
Accuracy: ± 1.5 dB
Frequency: 31.5 Hz to 8 kHz

C-322
BS-6

Datalogging Sound Level Meter
Tri-pod