




Visit us at [www.TestEquipmentDepot.com](http://www.TestEquipmentDepot.com)

## MODEL SL-4010

*Rugged and ergonomically built to fit into the palm of your hand.*

- Meets IEC 651 Type 2 requirements
- Large, easy-to-read LCD display
- Triple range measurement
- "A" frequency weighting (same as the human ear)
- 1/2" electret condenser microphone for high accuracy and longterm stability
- Internal 94dB calibration
- Data Hold and low battery indication
- Includes 9V battery

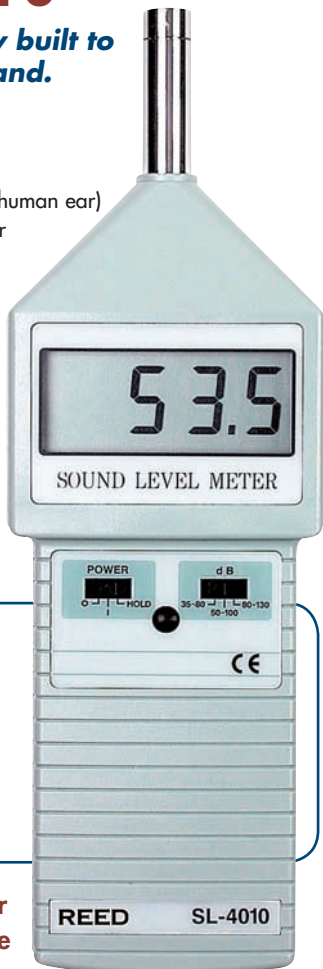

Range: 35 to 130 dB (A)  
Resolution: 0.1 dB  
Accuracy:  $\pm 1.5$  dB  
Frequency: 31.5 Hz to 8 kHz  
Time Weighting: Fast  
Power Supply: Single 9V battery  
Dimensions: 9.8 x 2.8 x 1.1"  
(250 x 70 x 28mm)  
Weight: 8.8 oz (250g)

**SL-4010**      **Sound Level Meter**  
**CA-05A**      **Soft Carrying Case**