




Visit us at www.TestEquipmentDepot.com

SERIES T3000

Bi-metal thermometer.

- All welded stainless steel construction
- Easy external recalibration adjustment
- Anti-parallax dial
- Hermetically sealed per ASME B40.3
- Accurate to 1% per ASME B40.3 Grade A
- Over-range protection is 50% up to 500°F (10% above 500°F)
- Fully gasketed glass lens
- Silicone filled models available for extreme vibration or low temperature application

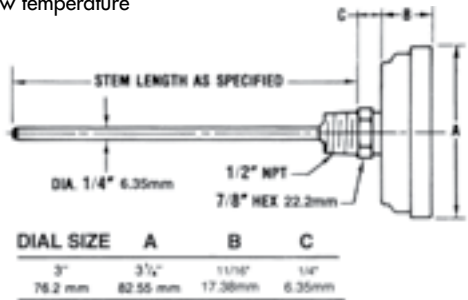

Model	Temperature Range	Stem Length	Price
T30025-250	0 to 250°F (-20 to 120°C)	2-1/2"	
T3004-250	0 to 250°F (-20 to 120°C)	4"	
T3006-250	0 to 250°F (-20 to 120°C)	6"	
T3009-250	0 to 250°F (-20 to 120°C)	9"	
T30025-550	50 to 550°F (0 to 260°C)	2-1/2"	
T3004-550	50 to 550°F (0 to 260°C)	4"	
T3006-550	50 to 550°F (0 to 260°C)	6"	