

## STREAMLIGHT STINGER®LED HP or STINGER DS®LED HP RECHARGEABLE FLASHLIGHT

**MARKET**
**APPLICATIONS:** Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

**DESCRIPTION:**

Compact &amp; extremely powerful, the Stinger®LED HP and Stinger DS®LED HP rechargeable flashlights offer 3 microprocessor controlled variable intensity modes, strobe mode and the latest in power LED technology. The Stinger DS®LED HP includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4®LED results in one of the lowest operating costs of any flashlight made.

**CASE MATERIAL:**

6000 series machined aircraft aluminum with non-slip rubberized comfort grip.

**DIMENSIONS:**

 Stinger®LED HP Length: 9.23 in. (23.44 cm)                      Diameter: Major Diameter: 2.20 in. (5.59 cm)  
 Stinger DS®LED HP Length: 9.65 in. (24.51 cm)                      Body Diameter: 1.17 in. (2.97 cm)

**WEIGHT:**

Stinger®LED HP: 13.6 oz (385 grams)\*    Stinger DS®LED HP: 14.0 oz (396 grams)\*

**LENS:**

Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

**LIGHT SOURCE:**

C4®LED technology, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:**

 High: 48,000 candela peak beam intensity, 438m beam distance and 200 lumens measured system output.  
 Medium: 24,000 candela peak beam intensity, 309m beam distance and 100 lumens measured system output.  
 Low: 11,000 candela peak beam intensity, 209m beam distance and 50 lumens measured system output.  
 Deep-dish parabolic reflector produces a long range targeting beam with optimum peripheral illumination to aid in navigation. Optimized electronics provides regulated intensity.

**ON/OFF:**

Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS®LED HP provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

**RUN TIME:**

 High: 2.00 continuous hours to the 10% output level.  
 Medium: 3.75 continuous hours to the 10% output level.  
 Low: 7.25 continuous hours to the 10% output level.  
 Strobe: 5.50 continuous hours.

**BATTERY:**

3-cell, 3.6 Volt Nickel-cadmium sub-C battery is rechargeable up to 1000 times.

**CHARGING:**

Fits existing Stinger®chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC. 2.5 hour fast charger or PiggyBack® charger models available.

**FEATURES:**

 C4®LED technology for extreme brightness.  
 IPX4 Rated for water resistant operation.  
 3 meter impact resistance tested.  
 Serialized for positive identification.  
 LED Charge-continuity indicator on charger base.  
 Compact, snap-in charger mounts in any position.

**WARRANTY:**

Streamlight warrants this product to be free of defect for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work or that you manage to break for as long as you own it. Of course, this limited lifetime warranty excludes abuse, batteries and chargers. Rechargeable batteries and chargers have a one (1) year warranty with proof of purchase.

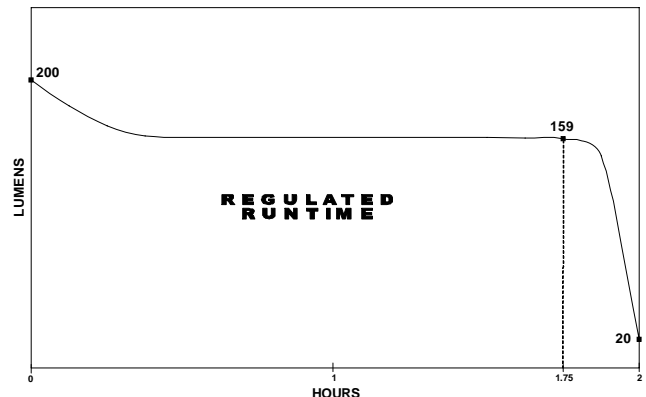
**APPROVALS\*\*:**

 Most models meet applicable European Community Directives. **CE**
**OPTIONAL ACCESSORIES:**

Safety wands, Ring holder, 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

\* With battery (included in purchase)

\*\* See product for specific ratings.

**PERFORMANCE CURVE**


All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 07/09/09

Revised: 09/22/09 Rev: 2

**Assembled In The USA.**

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

Document #227

TestEquipmentDepot.com