


CATV/TV Level Meter

TM-10

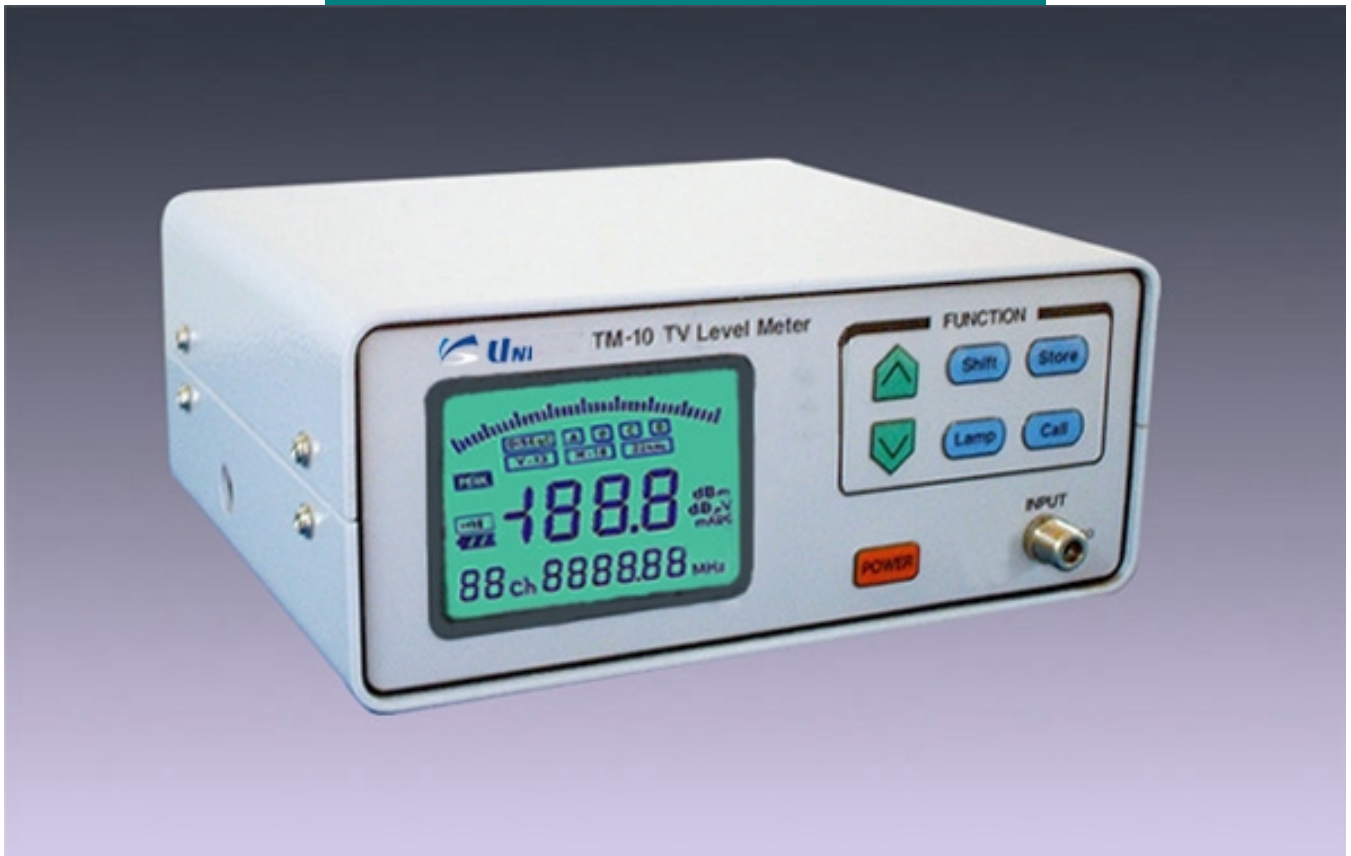

■ FEATURE

- Handheld, portable CATV/TV Signal Strength Meter
- PLL tuning control for Frequency Selection
- Video & Audio Level Measurement
- Line voltage Measurement (AC/DC)
- Auto Attenuator control (IF : 20dB, RF : 30dB)
- Built in Rechargeable Battery pack
- Auto power off
- 99 Favorite Channel Memory
- Buzzer for Acoustic signal strength monitoring
- Multi LCD display with Back light
- Last condition Store & memory
- Key Entry control
- Deluxe HANG-ON-NECK type CARRYING CASE for hand-free use

■ Technical Specification of TM-10 TV Level Meter

Function		Specification				
Frequency	Range	46MHz ~ 870 MHz with Channel selection				
	Tuning	Channel tuning throughout the band				
Favorite Channel memory		99 channels				
Input Impedance		75 Ω				
Input Level	Range	Video: 30 ~ 120 dBuV , Audio : 0 ~ 50 dBuV				
	Attenuator	50 dB (30dB, 20dB)				
	Max. Input Level	120 dBuV				
	Reading	In dBuV and dBm(Selectable)				
	Total Accuracy	± 3 dB				
Line Voltage Measurement		DC : 1 ~ 70 VDC AC : 10 ~ 70 VAC / 50 & 60 Hz				
Connector type		F-type (F-male)				
Indication		Multi LCD display with BAR graph Frequency, Channel, Level(dBuV,dBm), VDC, VAC, Battery level				
Environment Condition	Operating	0 ~ 40°C				
	Storage	-10 ~ 50°C				
Internal Power	Battery Capacity	9.6V/1400mAH[Metal hydride]				
	Battery Life	2.8HRS at 500mA				
External power Supply		DC 15V 500mA (Charge & Adapter)				
Weight		Approx. 1.5 kg				
Dimension		180(W) × 75(H) × 150(D) mm				
Standard Accessories		Carrying Case, Battery Charger				
Packing Details		Q'ty	Size(mm)	N.W.(kg)	G.W.(kg)	Remark
	Inner Packing	1	290(W)x215(D)x130(H)		2.0	
	Carton Packing	4	340(W)x575(D)x260(H)	8.0	9.0	