



"Telecommunication Products to solve Telecommunication Problems"



- **Slow Flash**

Indicates that a call is ON HOLD.

- **Power Up**

On initial power up, the lights will alternately flash for 3 seconds.

- **ONE YEAR LIMITED WARRANTY**

This SKUTCH PRODUCT is warranted against defects for a period of one (1) year from the date of the original invoice. Within this period, we will repair it without charge for parts and labor. To obtain warranty service the product must be returned, at the customer's expense, to SKUTCH Electronics along with a copy of the original invoice. After the unit has been repaired, SKUTCH will ship the PRODUCT back via UPS GROUND service at our expense. If any other form of return shipment is requested, the customer will pay for 100% of the shipping cost.

This Warranty does not apply if in the sole opinion of SKUTCH Electronics, the PRODUCT has been damaged by lightning or any other Acts of God, or by accident, misuse, neglect, or improper packing, shipping, modification or servicing by other than an authorized SKUTCH Service Center.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IN NO EVENT SHALL SKUTCH ELECTRONICS BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS WARRANTY OR OTHERWISE.

## **BA-5 Hook Flash Promotion On Hold Adapter (Two Line)**


**Version 3.2**

S/N A010001 and above

## • Introduction

Thank you for purchasing the BA-5 Promotion-On-Hold Adapter. This unit allows all phones on your lines to provide Promotion-On-Hold to your customers. The BA-5 can be installed on any telephone you wish. Once installed, all phones can access the unit. The unit is activated by pressing the **FLASH** button or by performing a **HOOK FLASH**, on your telephone, and then hanging up. The on-hold call can be picked up at any phone and the BA-5 will automatically reset. The BA-5 is simple to use and is compatible with almost every make and model of telephone.

## • Installation

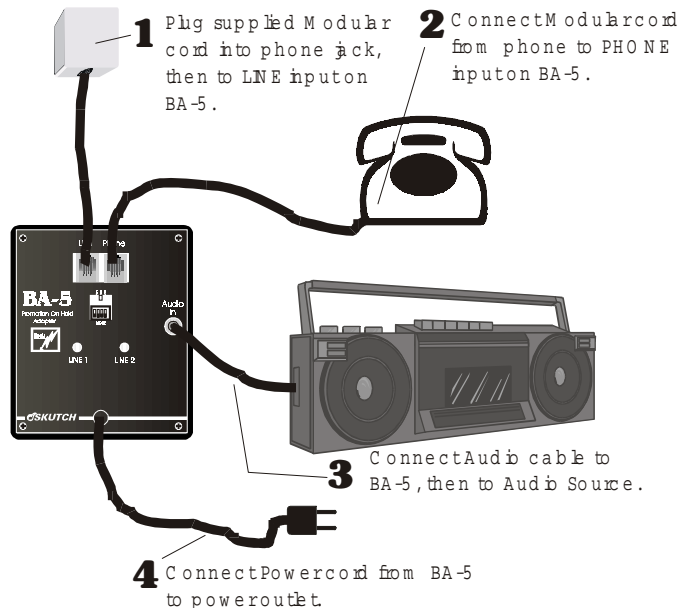

NOTE: If you connect the phone line to the BA-5 after you have powered up the unit, both lines will initially go on hold. To clear the lines simply pick up the phone and hang it up.

## • Operation

### • To place a call on hold

*Do NOT press the hold button!!...* Simply press the **FLASH** button on your telephone, wait for music, then hang up.

If you do not have a **FLASH** button on your telephone, perform a **HOOK FLASH** by momentarily depressing the **HANG UP SWITCH** on your phone, for ½ second, wait for the conformation **TONE**, then hang up.

The BA-5 will play music after the **FLASH** button has been depressed. After the start of the music, you have 5 seconds to hang up. After this time the BA-5 will reset.

### • To release the hold condition

Pick up any phone that is connected to that line, and the adapter will automatically reset.

### • Trouble shooting

### • Hanging up on Callers?

Make sure that you wait until you hear the music in the telephone before you hang up after pressing the **FLASH** button!

### • Lights

### • Steady On

Indicates that line is currently in use by a phone. They also stay on when a line is not connected to the BA-5.

### • Fast Flash

Indicates that the unit has detected a **FLASH** and is ready for you to hang up so that the BA-5 can hold the call.