

MiniTec® Digital MultiMeters


Rugged pocket design with 8 to 11 Functions
Includes Relative zero, Data Hold and Range Hold

- 4000 counts on large LCD with full function indication
- Measures AC/DC Voltage and Current, Resistance, Capacitance, Frequency and Temperature
- Temperature measurements to 1400°F (760°C)
- Duty Cycle, Continuity and Diode test
- Autoranging with manual range override
- 10A fuse protection
- Overload protection and indication
- Auto power off saves battery life
- Includes protective rubber holster, two 1.5V AAA batteries and test leads



MN26T

MN25

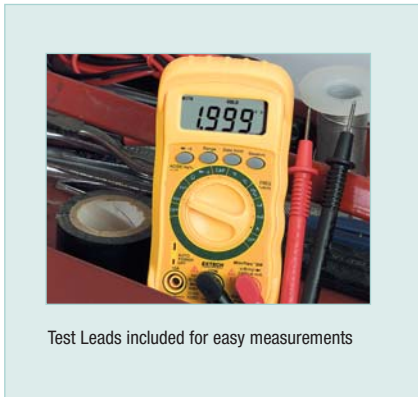

Test Leads included for easy measurements



| Specifications | MN25 | MN26T | Basic Accuracy | |
|------------------|---|-------------------------------------|----------------|-------|
| | (Manual Ranging) | (Autoranging) | (MN25/MN26T) | |
| Display Count | 2000 count | 4000 count | | |
| DC Voltage | 600V (0.1mV) | 600V (0.1mV) | ±0.5% | ±1.0% |
| AC Voltage | 600V (0.1V) | 600V (0.1mV) | ±1.5% | ±1.5% |
| DC Current | 10A (1µA) | 10A (0.1µA) | ±1.2% | ±1.5% |
| AC Current | 10A (1µA) | 10A (0.1µA) | ±1.8% | ±1.8% |
| Resistance | 2MΩ (0.1Ω) | 40MΩ (0.1Ω) | ±0.8% | ±1.2% |
| Capacitance | — | 200µF (0.001nF) | — | ±3.5% |
| Frequency | — | 10MHz (0.001Hz) | — | ±1.5% |
| Temperature | — | 0 to 1400°F (1°) 0 to 760°C (1°) | — | ±3.0% |
| Duty Cycle | — | 0.1% to 99.9% (0.1%) | ±1.2% | |
| Diode/Continuity | Yes | Yes | | |
| Warranty | 1 year | 1 year | | |
| Dimensions/ Wt | 4.8x2.4x1.6" (122x61x40mm)/ 9.17oz (260g) | | | |

Test Equipment Depot
1-800-517-8431

99 Washington Street
Melrose, MA 02176
Phone 781-665-1400
Toll Free 1-800-517-8431

Visit us at www.TestEquipmentDepot.com
Back to the Extech MN26T Product Info Page